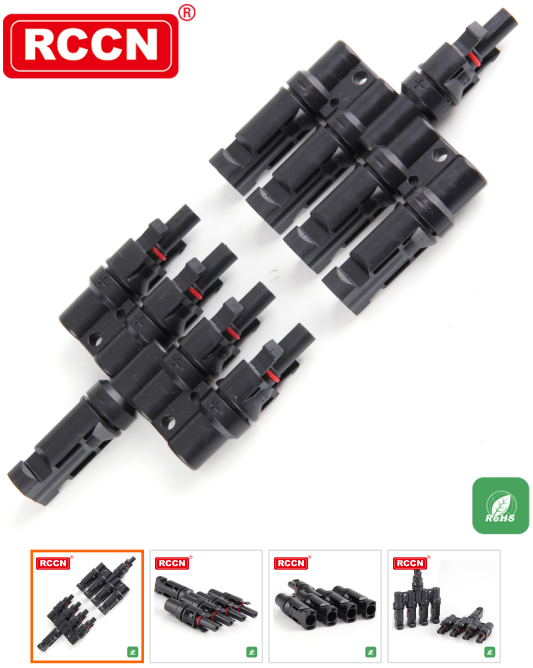


Solar photovoltaic system dedicated series and parallel five - way connector 1T4

Model: 1T4 (a four)

Material: PV connector for PPO material, hardware for the copper tin (contact resistance ≤ 0.5Ω)

Performance: anti-ultraviolet, corrosion-resistant, high and low temperature resistance, high current, low loss (low contact resistance), high life

Rated voltage: 1500V DC (IEC) 800V DC (UL)

Rated current: 50A

Ambient temperature range: -40 ° C to 90 ° C (IEC)

Lock the system plug connector: MC4

Protection class: IP67

Flame retardant rating: 94V-0

This connector is available for 2.5mm², 4mm² and 6mm² PV cables, please check the cable square

Solar photovoltaic connector photovoltaic connector MC4 photovoltaic system series and parallel five-way connector

Specification

Product Show

