



RCJYZ Standoff Insulator M4

Series: M4

Insulation material using flame retardant (UL94V-0) high strength, excellent electrical properties of plastic;

There are three types of copper, aluminum and steel inserts to choose from;

Used in power supply or cabinet to play the role of insulation and support for live parts;

Insulation resistance greater than 500MΩ;

Working temperature: -30 ℃ ~ 120 ℃

According to customer requirements assembly screw;

Can be customized according to customer requirements of different colors;


Customers can request a variety of customized products.

RCJYZ Standoff Insulator RCJYZ Standoff Insulator M4


Specification

Item No.	Thread	External Sizes (mm) (OD*H)	Rated Voltage (V)	Withstand Voltage (V/min)	Max Thread Screw Moment (Kgf.cm)	Insulate Material	Color	Insert material
RCJYZ-01Y	M4*6	Ø16*25	600	3000	50	BMC	Red	铜Copper
RCJYZ-01Y1	M4*6	Ø16*25	600	3000	50	BMC	Red	铜Copper
RCJYZ-08C (D)	M4*6	Ø20x20	400	1500	50	PF	Red /Black (D)	铜 Copper
RCJYZ-08D	M4*6	Ø20*20	400	1500	50	PF	Black	铜Copper
RCJYZ-30C	M4*6	Ø20*35	600	4000	100	PF	Black	铜Copper
RCJYZ-35A	M4*10	Ø16*14	1000V	3000	40	PF	Red	铜Copper

Product Show

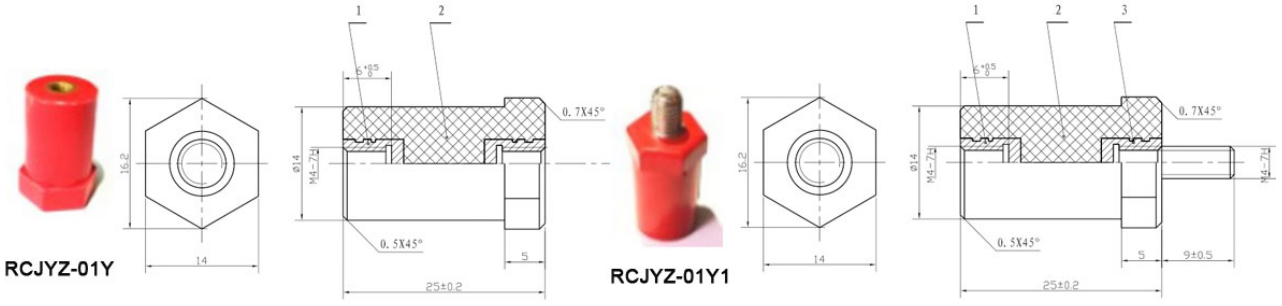


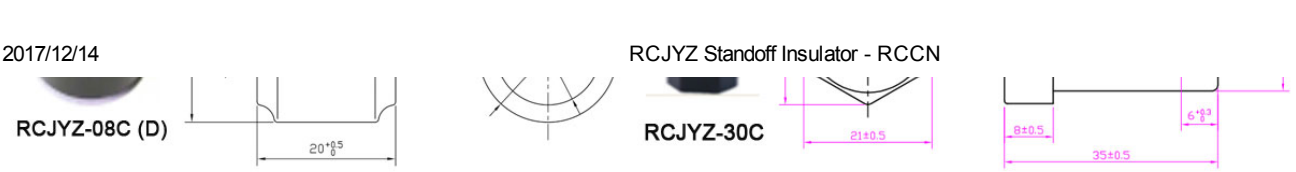



RCJYZ-08C (D)
RCJYZ-30C
21±0.5
8±0.5
35±0.5



RCJYZ-35A

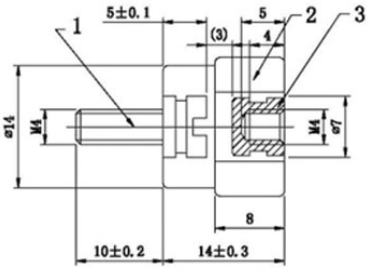
1
5±0.1
(3)
5
4
2
3
ø14
M4
M4
ø7
8
10±0.2
14±0.3


6-R1
(15.86)
14±0.1